

## Schedules

The Schedules tab is displayed if enabled when setting up your account. This allows you to add, edit, or delete Schedules in your system. When the tab is selected, all the schedules assigned to the current system are listed.


### Refresh System

Click Refresh to reload your system information and load any changes to Arming, Outputs, Schedules, or Favorites made at a keypad into the Virtual Keypad.

### Search Schedules:

1. Select the Schedules tab.
2. Click in the Search Schedules field and enter the name of the schedule you wish to search for. As you type, any elements that match the search criteria will display in the list.

For example, if "Light4" exists in a Favorite, it will be displayed in the list when "Light" is entered in the search field.

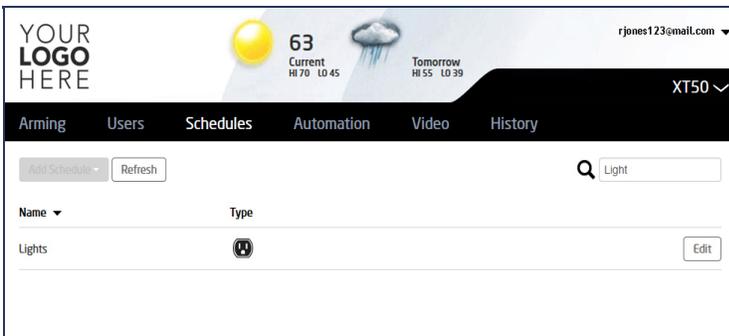


### XT30/XT50/XTL/XTLC/XTLN/XTLN-WiFi/CellComSL Communicator Schedule

An Arming Schedule is used for automatic arming and disarming and always occurs at the same time until you change or delete the schedule. Enter the time to Disarm and Arm your system in 12 hour clock format (12:00 to 11:59 AM or PM). You must enter a Begin and End time or the system will not recognize the schedule.

### Create an Arming Schedule:

1. Select the Schedules tab.
2. Click the Add Schedule button.
3. If there are any unused Arming schedules available, Arming will display in a list.

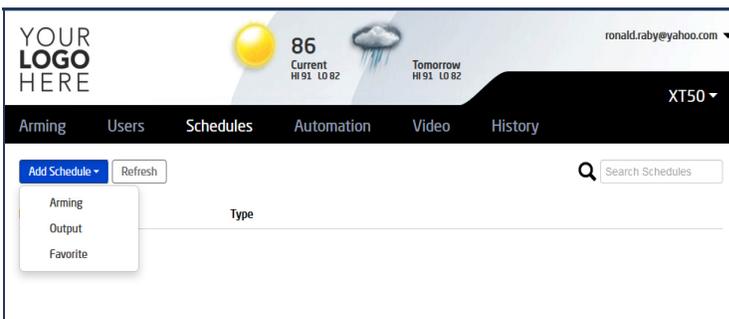

4. Click Arming to display the Arming Schedule form.

## Arming Schedule

Cancel
Save
Delete

### ⊙ Times

	Disarm	Sun	Arm
Sunday	<input type="text"/>	<input type="text"/>	<input type="text"/>
Monday	<input type="text" value="07:00 AM"/>	<input type="text" value="07:00 PM"/>	<input type="text"/>
Tuesday	<input type="text" value="08:00 AM"/>	<input type="text" value="07:00 PM"/>	<input type="text"/>
Wednesday	<input type="text" value="08:00 AM"/>	<input type="text" value="07:00 PM"/>	<input type="text"/>
Thursday	<input type="text" value="07:00 AM"/>	<input type="text" value="07:00 PM"/>	<input type="text"/>
Friday	<input type="text" value="08:00 AM"/>	<input type="text" value="07:00 PM"/>	<input type="text"/>
Saturday	<input type="text" value="08:00 AM"/>	<input type="text" value="06:00 PM"/>	<input type="text"/>

### ⊙ Closing Check

Check here for a reminder on your keypad when the system is not armed at the scheduled **Arm** time.

### 🔒 Automatic Arming

When **Auto Arm** is checked, if the system is disarmed before the **Disarm** time, it will rearm itself in one hour.

	Auto Disarm	Auto Arm
PERIMETER	<input type="checkbox"/>	<input checked="" type="checkbox"/>
INTERIOR	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
AREA 3	<input type="checkbox"/>	<input type="checkbox"/>

5. Enter the Disarm (Opening) and Arm (Closing) times for each day in the Schedule.
6. Click the Closing Check box if you wish to receive a reminder on your keypad when the system is not armed at the scheduled Arm time.
7. Click to select any desired Auto Disarm or Auto Arm options. This allows selected area(s) to arm automatically according to permanent, temporary, or extended schedules. If no schedules are programmed, the area auto arms every hour.
8. Click the Save button to save the new Arming Schedule. The new Arming Schedule will display in the list.

### Delete an Arming Schedule:

1. Select the Schedules tab.
2. Select the Arming Schedule from the list.
3. Click the Delete button.
4. A text box displays to confirm you wish to delete this schedule. Press the Yes button and the schedule will be removed from your system. If the Cancel button is selected, the schedule will be removed.

**Confirm**

**Are you sure you want to delete?**

Yes
Cancel

### Create an Output Schedule:

1. Select the Schedules tab.
2. Click the Add Schedule button.
3. If there are any unused Output schedules available, Output will display in the list.
4. Click Output to display the Output Schedule form.
5. Click the Select Output box to select the output you wish to assign.
6. Enter the On and Off times for each day in the Schedule.
7. Click the Save button to save the new Output Schedule. The new Output Schedule will display in the list.

### Output Schedule

Cancel
Save
Delete

Lights

#### ⌚ Times

	On	Off
Sunday	<input type="text"/>	<input type="text"/>
Monday	07:00 AM	08:30 PM
Tuesday	07:00 AM	08:30 PM
Wednesday	07:00 AM	08:30 PM
Thursday	07:00 AM	08:30 PM
Friday	07:00 AM	08:30 PM
Saturday	07:00 AM	06:30 PM

#### Delete an Output Schedule:

1. Select the Schedules tab.
2. Select the desired Output Schedule from the list.
3. Click the Delete button.
4. A text box displays to confirm your wish to delete this schedule. Press the Yes button and the schedule will be removed from your system. If the Cancel button is selected, the schedule will be removed.

**Confirm**

**Are you sure you  
want to delete?**

Yes
Cancel

#### Create a Favorites Schedule:

1. Select the Schedules tab.
2. Click the Add Schedule button.
3. If there are any unused Favorite schedules available, Favorite will display in the list.
4. Click Favorite to display the Favorite Schedule form.
5. Click the Select Favorite box to select the favorite you wish to assign.
6. Enter the time you wish to activate the Favorite for each day in the Schedule.
7. Click the Save button to save the new Favorite Schedule. The new Favorite Schedule will display in the list.

**Favorite Schedule**

Cancel Save Delete

Early Morning

**Times**

	Activate
Sunday	06:30 AM
Monday	07:30 AM
Tuesday	07:30 AM
Wednesday	07:30 AM
Thursday	06:30 AM
Friday	07:30 AM
Saturday	07:30 AM


### Delete a Favorites Schedule:

1. Select the Schedules tab.
2. Select the desired Favorite Schedule from the list.
3. Click the Delete button.
4. A text box displays to confirm your wish to delete this schedule. Press the Yes button and the schedule will be removed from your system. If the Cancel button is selected, the schedule will be removed.

**Confirm**

Are you sure you want to delete?


Yes Cancel

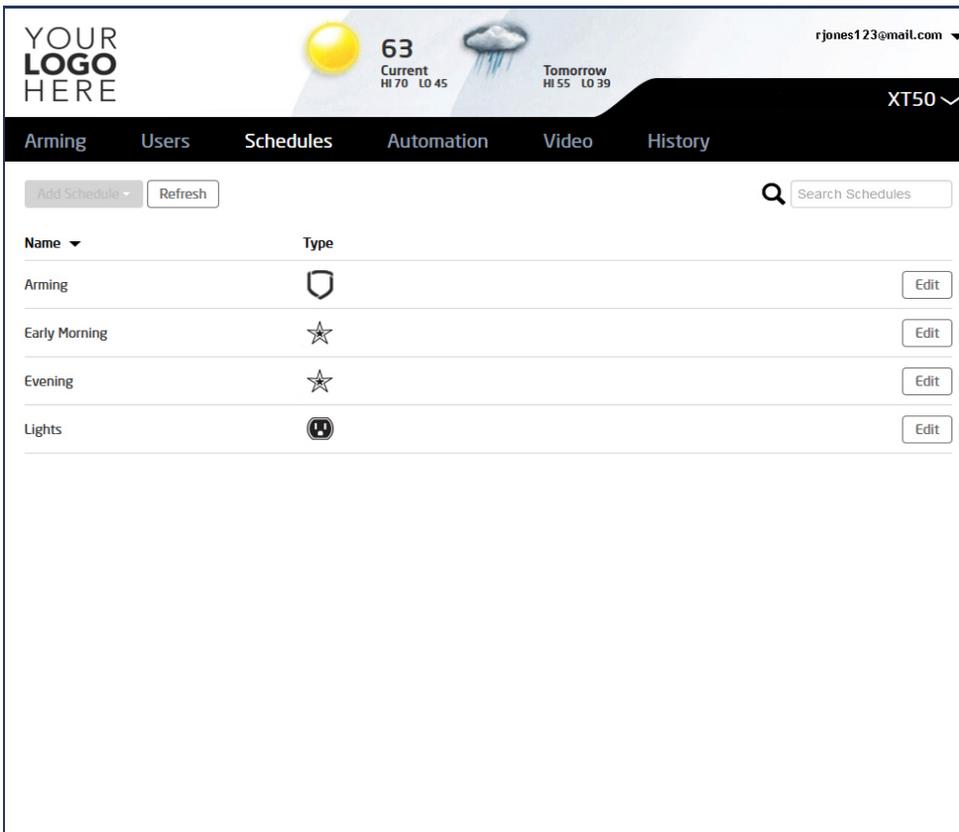


**XR550 Series:**

**Edit Area Settings:**

1. Select the Schedules tab.
2. Click the Area Settings button.
3. The Area Settings form displays.

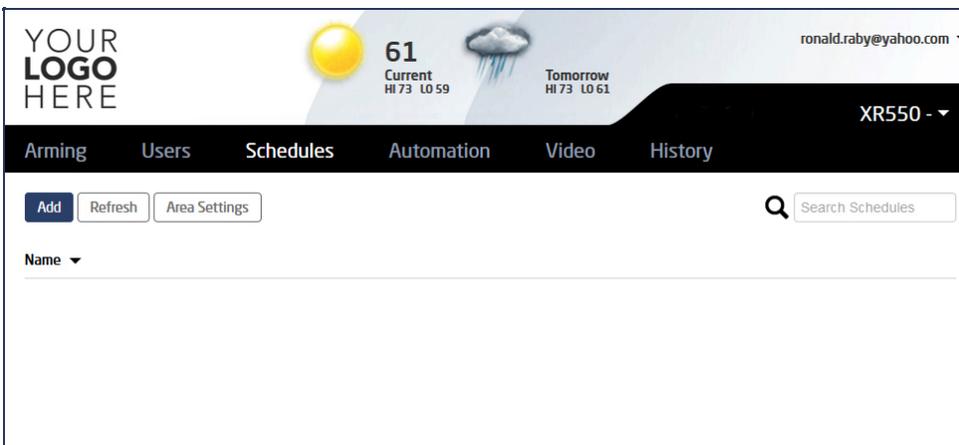


4. Click the Closing Check box if you wish to receive a reminder on your keypad when the system is not armed at the scheduled Arm time. Clicking again will remove the Closing Check.

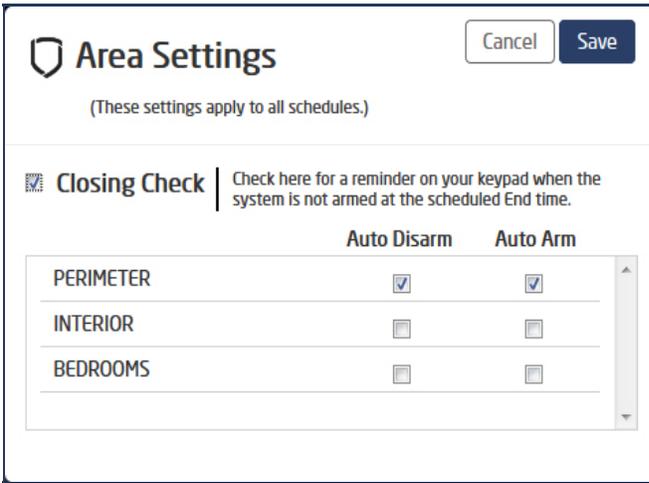

5. Click to select any desired Auto Disarm or Auto Arm options. This allows selected area(s) to arm automatically according to permanent, temporary, or extended schedules. If no schedules are programmed, the area auto arms every hour.
6. Click the Save button to save the new Area Settings. The new Auto Disarm or Auto Arm options will display as check marks in Areas section of the System Schedules form.

**Create an Area Schedule:**

1. Select the Schedules tab.
2. Select the Add Schedule button.
3. The System Schedules form displays. Click the down arrow to display the Areas section.
4. Enter the Begin (Opening) and End (Closing) times for each day in the Schedule.
5. Click the check box for each area you wish to arm or disarm in the Schedule.
6. Click the Save button to save the new Area Schedule. The new Area Schedule will display in the list.

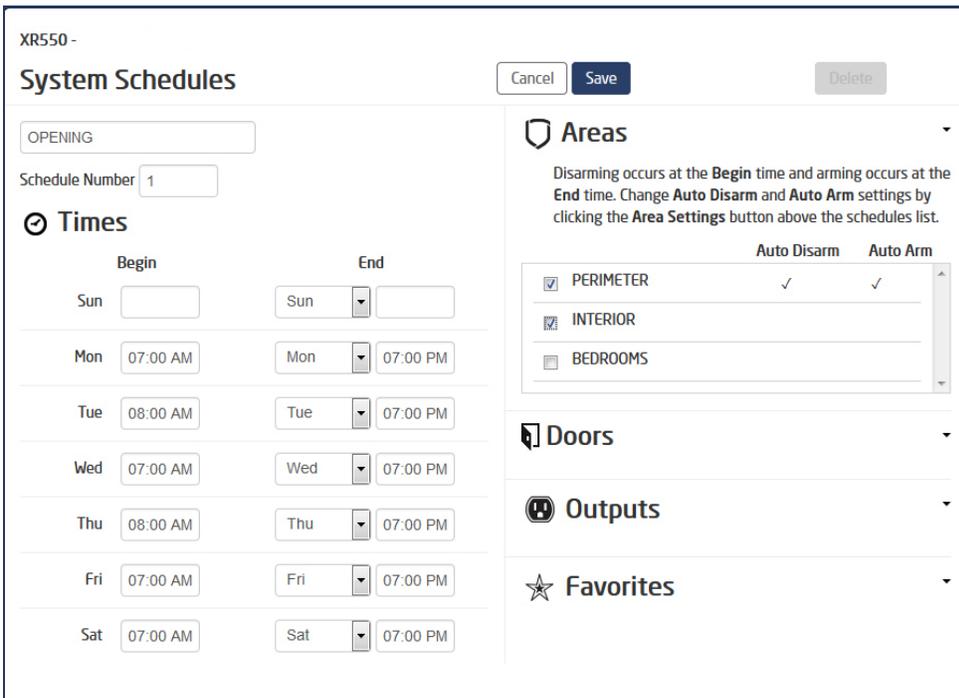

**Delete an Area Schedule:**

1. Select the Schedules tab.

2. Select the Arming Schedule from the list.
3. Click the Delete button.
4. A text box displays to confirm you wish to delete this schedule. Press the Yes button and the schedule will be removed from your system. If the Cancel button is selected, the schedule will be removed.

**Confirm**

**Are you sure you  
want to delete?**

### Create a Doors Schedule:

1. Select the Schedules tab.
2. Click the Add Schedule button.
3. The System Schedules form displays. Click the down arrow to display the Doors section.
4. Enter the Begin (Opening) and End (Closing) times for each day in the Schedule.
5. Click the check box for each door you wish to lock or unlock in the Schedule.
6. Click the Save button to save the new Doors Schedule. The new Doors Schedule will display in the list.

XR550 -

**System Schedules** Cancel Save Delete

DOOR OPENING

Schedule Number

**Times**

	Begin	End
Sun	<input type="text"/>	Sun <input type="text"/>
Mon	<input type="text" value="08:00 AM"/>	Mon <input type="text" value="07:00 PM"/>
Tue	<input type="text" value="08:00 AM"/>	Tue <input type="text" value="07:00 PM"/>
Wed	<input type="text" value="08:00 AM"/>	Wed <input type="text" value="07:00 PM"/>
Thu	<input type="text" value="08:00 AM"/>	Thu <input type="text" value="07:00 PM"/>
Fri	<input type="text" value="08:00 AM"/>	Fri <input type="text" value="07:00 PM"/>
Sat	<input type="text" value="08:00 AM"/>	Sat <input type="text" value="07:00 PM"/>

**Areas**

**Doors**

Selected doors unlock at the Begin time and lock at the End time.


DEVICE 1	<input checked="" type="checkbox"/>
DEVICE 3	<input type="checkbox"/>
DEVICE 4	<input checked="" type="checkbox"/>

**Outputs**

**Favorites**

### Delete a Doors Schedule:

1. Select the Schedules tab.
2. Click Edit to display the desired Doors Schedule.
3. Click the Delete button.
4. A text box displays to confirm your wish to delete this schedule. Press the Yes button and the schedule will be removed from your system. If the Cancel button is selected, the schedule will be removed.

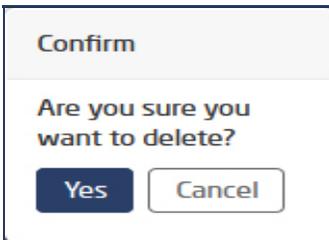

### Create an Output Schedule:


1. Select the Schedules tab.
2. Click the Add Schedule button.
3. The System Schedules form displays. Click the down arrow to display the Outputs section.
4. Enter the Begin (Opening) and End (Closing) times for each day in the Schedule.
5. Click the check box for each output you wish to assign..
6. Click the Save button to save the new Outputs Schedule. The new Outputs Schedule will display in the list.

 A screenshot of the "System Schedules" form for device XR550. The form has a title bar with "XR550 - System Schedules" and buttons for "Cancel", "Save", and "Delete". Below the title bar, there is a text input field for "LIGHTS" and a "Schedule Number" field containing the value "2". A "Times" section contains a table for setting begin and end times for each day of the week. The "Outputs" section is expanded, showing a list of outputs with a checked checkbox for "Lights". A "Favorites" section is also visible at the bottom.
 

Day	Begin	End
Sun		
Mon	07:00 AM	08:30 PM
Tue	07:00 AM	08:30 PM
Wed	07:00 AM	08:30 PM
Thu	07:00 AM	08:30 PM
Fri	07:00 AM	08:30 PM
Sat	07:00 AM	08:30 PM

### Delete an Output Schedule:

1. Select the Schedules tab.
2. Click Edit to display the desired Outputs Schedule.
3. Click the Delete button.
4. A text box displays to confirm your wish to delete this schedule. Press the Yes button and the schedule will be removed from your system. If the Cancel button is selected, the schedule will be removed.

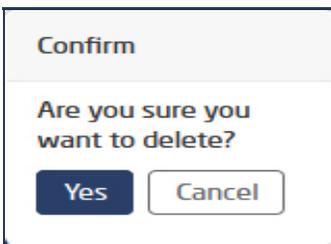

### Create a Favorite Schedule:


1. Select the Schedules tab.
2. Click the Add Schedule button.
3. The System Schedules form displays. Click the down arrow to display the Favorites Section.
4. Enter the Begin (Opening) and End (Closing) times for each day in the Schedule.
5. Enter the time you wish to activate the Favorite for each day in the Schedule.
6. Click the Favorites check box to select the Favorites you wish to assign.
7. Click the Save button to save the new Favorite Schedule. The new Favorite Schedule will display in the list.

 A screenshot of the "Favorite Schedule" form. At the top, there are three buttons: "Cancel", "Save", and "Delete". Below the buttons is a dropdown menu currently showing "Early Morning". Underneath is a section titled "Times" with a circular icon to its left. This section contains a table with two columns: the day of the week and the "Activate" time. The "Activate" column has a small "Activate" label above it. The table rows are:
 

	Activate
Sunday	06:30 AM
Monday	07:30 AM
Tuesday	07:30 AM
Wednesday	07:30 AM
Thursday	06:30 AM
Friday	07:30 AM
Saturday	07:30 AM

### Delete an Favorite Schedule:

1. Select the Schedules tab.
2. Click Edit to display the desired Favorites Schedule from the list.
3. Click the Delete button.
4. A text box displays to confirm your wish to delete this schedule. Press the Yes button and the schedule will be removed from your system. If the Cancel button is selected, the schedule will be removed.

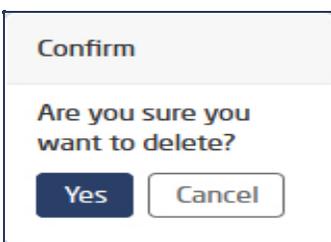

YOUR LOGO HERE

63  
Current  
HI 70 LO 45

Tomorrow  
HI 55 LO 39

rjones123@mail.com

XT50

Arming Users Schedules Automation Video History

Add Schedule Refresh

Search Schedules

Name	Type	
Arming		Edit
Early Morning		Edit
Evening		Edit
Lights		Edit